

## Las Vegas



This is low profile version in Las Vegas series, designed for limited space in a ceiling, such as the areas under air conduit. The height of this fitting is only 62mm, so it is possible to be used in a depth  $\leq 50$ mm ceiling. Fixed and adjustable, with trim and trimless versions, various reflectors are available; In this range, there is only one cut-out size which is 75mm; nevertheless, the wattages can be 5W, 7W or 9W, and drivers can be different dimming type. The LED module is fixed to the body without magnets.

Wattage: 5W / 7W / 9W

CRI : Ra $\geq$ 95

CCT : 2700K / 3000K / 3500K / 4000K

Beam : 12° / 24° / 36° / 50°

Cut-out :  $\Phi 75$ mm

Finish : Matt white trim, silver grey, heatsink and mirror reflector

Material : Die-casting Aluminum trim and heatsink, PC reflector

Driver : Constant current remote LED driver included


Driver can be ON/OFF, Triac dimming, 0/1-10V dimming or DALI

IP rating: IP20

Suitable for 10-20mm thick ceiling board




### Reflector Options ( F01A-F07A for Adjustable )

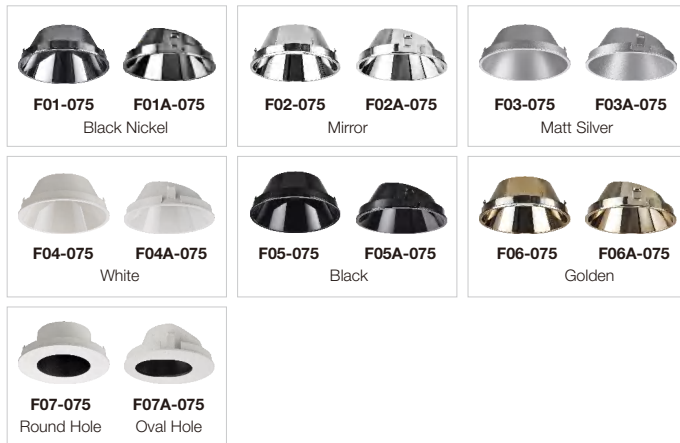


### Parameters

LED Module	Driver	CCT	Luminaire Lumen
5W	100mA	3000K	200-350lm (Fixed & Adjustable)
7W	150mA		350-500lm (Fixed & Adjustable)
9W	200mA		450-700lm (Fixed & Adjustable)









### Extra Lens Options

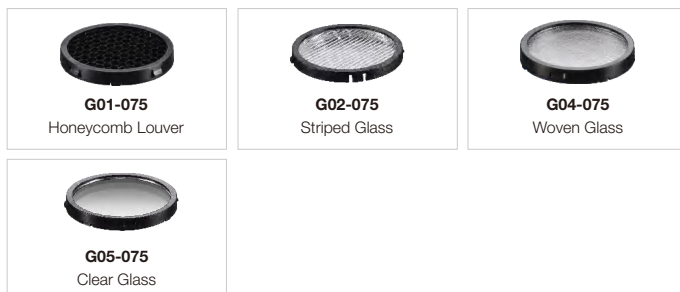

### Dimensions

Model	Wattage	Cut-out	Diameter(D)	Height(H)	Line Art
YHJ075C1P	5W 7W 9W	$\Phi 75$ mm	$\Phi 86$ mm	62mm	
YHJ075C1PW			$\Phi 110$ mm		
YHJ075C2P			$\Phi 86$ mm		
YHJ075C2PW			$\Phi 110$ mm		

# RECESSED DOWNLIGHT DATA SHEET

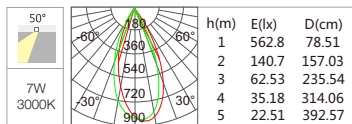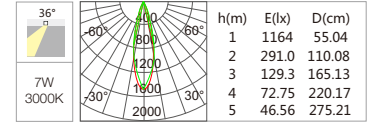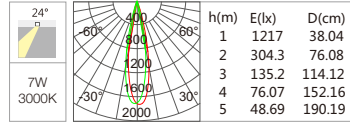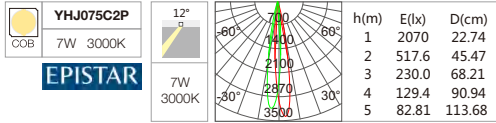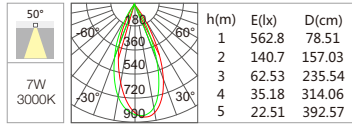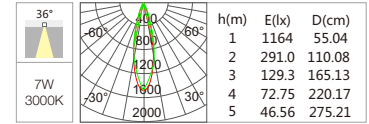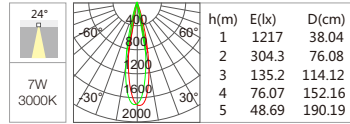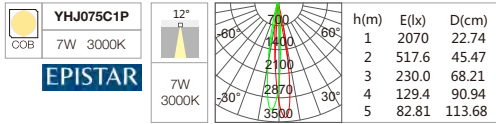

\* IES files are available for downloading from the website; or if needed, contact our sales managers please.

## Driver Options

<b>5W</b>	Non Dim	CCD05/100/25-41/0.5	<b>7W</b>	Non Dim	CCD07/150/25-41/0.5	<b>9W</b>	Non Dim	CCD09/200/25-41/0.9
	Triac Dim	CCD05/100/30-41/TD		Triac Dim	CCD07/150/30-41/TD		Triac Dim	CCD09/200/30-41/TD
	0/1-10V Dim	CCD05/100/30-41/VD		0/1-10V Dim	CCD07/150/30-41/VD		0/1-10V Dim	CCD09/200/30-41/VD
	DALI Dim			DALI Dim	OTI DALI 15*(Osram)		DALI Dim	OTI DALI 15*(Osram)

\* Some of the other branded drivers may available as options, please contact our sales managers if needed.

## ORDERING INFORMATION :

Example : YHJ075C1P-5W-927-15D-ND-F01-G01

Model	Wattage	CRI & CCT	Beam	Dimming	Reflector	Accessories
<b>YHJ075C1P</b>	<b>5W</b>	<b>927</b>	<b>15D</b>	<b>ND</b>	<b>F01</b>	<b>G01</b>
YHJ075C1P	5W	927 Ra ≥ 95 2700K	15D 15°	ND Non Dim	F01 (A) Black Nickel	G01 Honeycomb Louver
YHJ075C2P	7W	930 Ra ≥ 95 3000K	24D 24°	TD Triac Dim	F05 (A) Black	G02 Striped Glass
YHJ075C1PW	9W	935 Ra ≥ 95 3500K	36D 36°	VD 0/1-10V Dim	F06 (A) Golden	G04 Woven Glass
YHJ075C2PW		940 Ra ≥ 95 4000K	50D 50°	DD DALI Dim	F07 Round Hole	G05 Clear Glass
					F04 (A) White	
					F07 (A) Oval Hole	

The above listed reflectors should be specified when ordering.

\*(A) for Adjustable

The accessories should be specified separately.

The above listed reflectors should be specified when ordering. The above listed accessories is NOT compulsory, however could be specified when ordering.