




Bergen

CREE is used to highlight LED COB light source, overall lighting effect is higher than 75Lm/w, with single control or group control function, has 25 kinds of memory scenes. Products supporting high-power dimming power supply, short circuit protection, overload protection, wide voltage use, high power factor, less pollution to the power grid. Applicable to the banquet hall, hotel lobby, automobile 4S shop, exhibition hall, etc.

Wattage: 20W
 CRI : Ra≥90
 CCT : 3000K
 Beam : 10° / 20°
 Phase : 1 Phase
 3 Phase (can be customized)
 Finish : Sanded black / Sanded white
 Material : Die-casting aluminum housing
 Driver : Constant current LED driver included
 IP rating: IP20

Accessories (to be ordered separately)

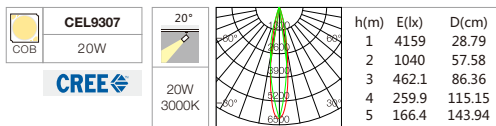

Parameters

LED Module	Driver	CCT	Luminaire Lumen
20W	450mA	3000K	1200-1300lm

Dimensions

Model	Wattage	Diameter(D)	Height(H)	Line Art
CEL9307	20W	φ100mm	209mm	



Controller
 Model: CEP1011E
 Signal Transmission Mode: 2.4G
 Suitable for CEL9307/CEX9307/CED9307

Driver Options

20W	Non Dim CEC0450-12SH-P
-----	--------------------------

* IES files are available for downloading from the website; or if needed, contact our sales managers please.

* Some of the other branded drivers may available as options, please contact our sales managers if needed.

ORDERING INFORMATION :

Example : CEL9307-20W-930-1P-10D-SBK-ND

Model	Wattage	CRI & CCT	Phase	Beam	Finish	Dimming
CEL9307	20W	930	1P	10D	SBK	ND
CEL9307	20W	930 Ra ≥ 90 3000K	1P 1 Phase 3P 3 Phase	10D 10° 20D 20°	SBK Sanded Black SW Sanded White	ND Non Dim TD Triac Dim VD 0/1-10V Dim DD DALI Dim PD PWM Dim