




XS

XS neon flex is particularly versatile. With the side and top bending structure design, the flex can be freely shaped towards the left or right, upwards or downwards that enable a wide range of lighting concepts and offer absolutely individual solutions for all applications both indoor and outdoor. Choose from different width and bending structures to find the right model for your projects.


- Input Voltage : DC 24V
- Wiring Mode : Double ended out line
- Wattage : 9W/M
- CRI : Ra≥80
- CCT : 2700K / 3000K / 3500K / 4000K / 6400K
Red / Green / Blue
- Beam : 155°
- Finish : White
- Material : FPCB and extruded silicone
- Driver : DC 24V constant voltage remote LED driver excluded
Driver can be ON/OFF, Triac dimming, 0/1-10V dimming or DALI
- IP rating : IP67



Accessories Options

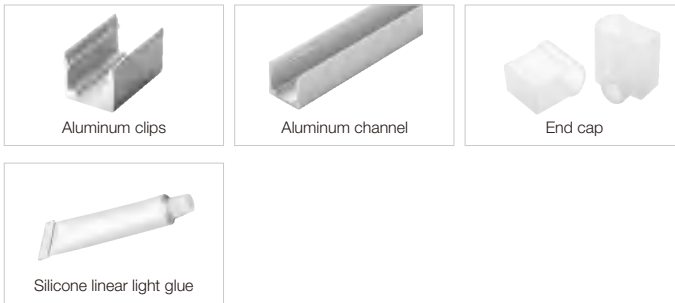

CXGB0817C
Minimum cutting unit : 50mm



Parameters

Wattage	LED QTY (pcs/m)	CCT	Luminaire Lumen (lm/m)
9W	120	3000K	260-280lm/m

Dimensions

Model	Wattage	Length(L)	Width(W)	Height(H)	Line Art
CXGB0817C	45W	5000mm	8mm	17mm	

Driver Options

80W	Non Dim	CVD/80/24	150W	Non Dim	CVD/150/24
------------	---------	-----------	-------------	---------	------------

* Some of the other branded drivers may available as options, please contact our sales managers if needed.

ORDERING INFORMATION :

Example : CXGB0817C-120-827-24V-IP67-ND

Model	LED QTY/M	CRI & CCT	Input Voltage	IP Rating	Dimming
CXGB0817C	120	827	24V	IP67	ND
CXGB0817C	120	827 Ra ≥ 80 2700K 830 Ra ≥ 80 3000K 835 Ra ≥ 80 3500K 840 Ra ≥ 80 4000K 864 Ra ≥ 80 6400K R Red G Green B Blue	24V	IP67	ND Non Dim TD Triac Dim VD 0/1-10V Dim DD DALI Dim

The above listed accessories is NOT compulsory, however could be specified when ordering.

*Remarks: The specs is subject to change without prior notice.